





Current Tools

FOR THE PROFESSIONAL ELECTRICIAN

Current Tools™ Reel Stands and Spindles

**Models 660, 670, 680, 685 Reel Stands
Models 661, 671, 681 Spindles**

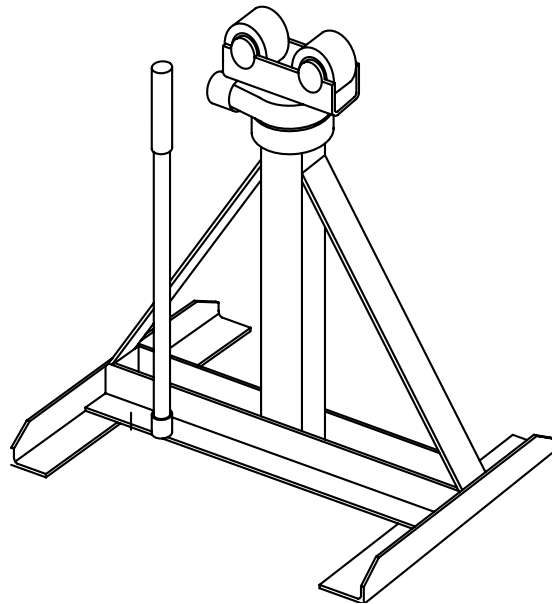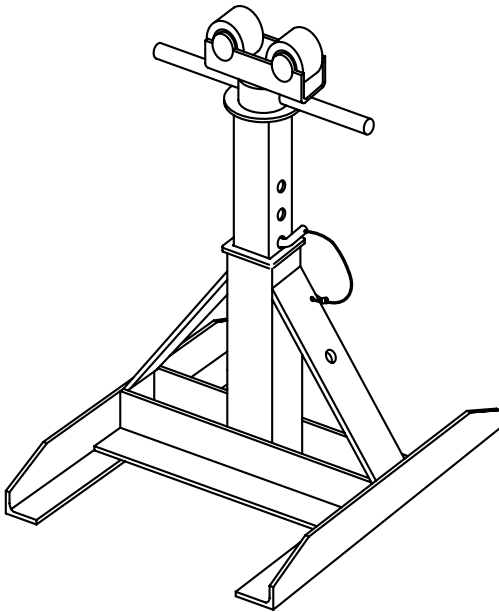

Operating, Maintenance, Safety and Parts Manual

05/2024



Read and understand this material before using the Reel Stands and Spindles. Failure to understand how to safely operate and service these units could result in serious injury or property damage.

This manual is free of charge. All personnel who operate the Reel Stands and Spindles should have a copy of this manual and read and understand its contents. To request a copy, call, write to the address below, or visit our website.

**CURRENTTOOLS • P. O. BOX 17026 GREENVILLE, SC 29606
800.230.5421 or 864.721-4230 • FAX 864.721-4232
www.currenttools.com**



TABLE OF CONTENTS

Safety Alerts	2
Safety Information	3
Specifications	4
Operating Instructions	5
Maintenance	6
Parts List	6
Exploded View and Parts List — 680 and 685	7



SAFETY ALERTS



Safety Alert Symbol

THIS SAFETY SYMBOL is used to call your attention to instructions that concern your personal safety. It means: ATTENTION! BE AWARE! THIS IS AN IMPORTANT SAFETY INSTRUCTION!

Read, understand and follow these safety instructions. Failure to follow these safety instructions may result in injury or death.

DANGER

Immediate hazards which, if not avoided, WILL result in serious personal injury or death.

WARNING

Hazards or unsafe practices which, if not avoided, COULD result in serious personal injury or death.

CAUTION

Hazards or unsafe practices which, if not avoided, COULD result in minor personal injury or property damage.

RETAIN SAFETY INFORMATION



This manual should be read and understood by all personnel who operate or service the Reels Stands and Spindles. Failure to understand how to safely operate and service these units could result in serious injury or property damage. The Reel Stands and Spindles should only be operated and serviced by qualified personnel.



IMPORTANT SAFETY INFORMATION

Follow ALL safety information provided by the manufacturer.

- ⚠ CAUTION** ALWAYS use the reel stands on a smooth, level, firm surface.
- ⚠ CAUTION** ALWAYS chock cable reels at points where they contact the ground to prevent movement during set up
- ⚠ CAUTION** Hands and feet must be kept clear when loading and unloading cable reels.
- ⚠ CAUTION** Make sure work area is clear of bystanders prior to loading, unloading or dispensing cable. A moving reel can injure nearby personnel.
- ⚠ CAUTION** Only use the correct CurrentTools spindle with the reel stands. DO NOT substitute any other material for the CurrentTools spindle as they may not support the cable reel or may fall off the reel stands.
- ⚠ CAUTION** Casters or wheels should not be attached to reel stands.
- ⚠ CAUTION** NEVER exceed the maximum rated capacity of the reel stand.
- ⚠ CAUTION** NEVER use the reel stand for any purpose other than the manufacturers intended use. Personal injury or property damage may result if used in any manner other than what is described in this manual.
- ⚠ CAUTION** For Model #685, **ALWAYS** ensure the ratchet head retaining screws are in place and securely tightened prior to use (see exploded view and parts list on page 7).

REEL STANDS

Model No.	660
Max. Reel Diameter	56"
Max. Weight Capacity	2,500 lb. each
Base Dimensions	14 ⁵ / ₈ " X 14 ⁷ / ₈ "
Weight	27 lbs.
Max. Height	27"
Model No.	670
Max. Reel Diameter	96"
Max. Weight Capacity	2,500 lb. each
Base Dimensions	18" X 24 ⁵ / ₈ "
Weight	46 lbs.
Max. Height	54"
Model No.	680 and 685
Max. Reel Diameter	90"
Max. Weight Capacity	3,750 lb. each
Base Dimensions	21" X 24 ⁵ / ₈ "
Weight	99 lbs.
Max. Height	45"

SPINDLES

Model No.	661
Max. Reel Width	47"
Weight	39 lbs.
Use with Reel Stand Numbers	660, 670
Model No.	671
Max. Reel Width	61"
Weight	47 lbs.
Use with Reel Stand Numbers	660, 670
Model No.	681
Max. Reel Width	88"
Weight	119 lbs.
Use with Reel Stand Number	680 and 685


OPERATING INSTRUCTIONS

NOTE: For Model #685, ALWAYS ensure the ratchet head retaining screws (Part # 685-001) are in place and securely tightened prior to use.


- 1 A complete setup consists of two of the same model number CurrentTools reel stands and one CurrentTools reel stand spindle. (The #661 spindle and the #671 spindle must only be used with the #660 or #670 reel stands. The #681 spindle must only be used with the #680 or #685 reel stand).

- 2 Chock the cable reel to prevent movement during setup.

- 3 Insert the correct spindle through the center holes of the cable reel (See Figure 5A).

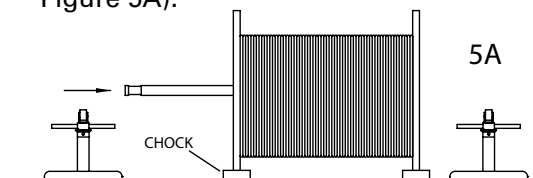


- 4 Place a reel stand under each end of the spindle and align the reel stand rollers with the grooves in both ends of the spindle. (See Figure 5B).

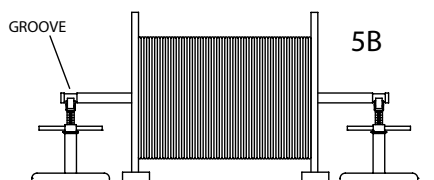


NOTE: Depending on the beginning spindle height, it may be necessary to elevate the telescoping square tubing of the 660 or 670 reel stand. Manually lift the telescoping square tubing to the desired height and insert the pin(s) provided.

Pin(s) should go through both sides of tubing and rest on top of the base to prevent downward movement. (See Figure 5C).




CAUTION

NEVER support a load with handle positioned as shown below. Bottom of handle nut must always contact support washer as shown in Figure 5C.

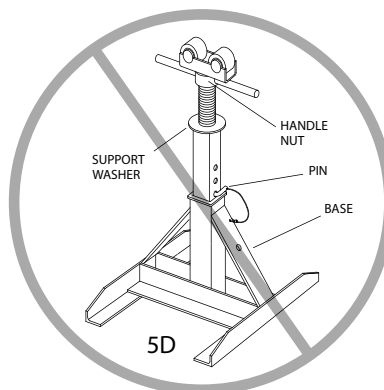


Failure to observe this precaution may result in injury or property damage.

- 5 Raise the threaded rod on one of the reel stands by turning the handle clockwise until the cable reel clears the ground. (See Figure 5E).

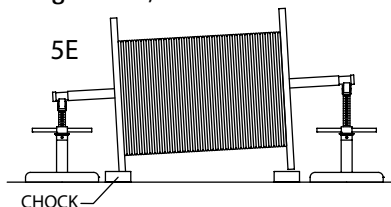

NOTE: For the Model #680 and #685 reel stand, thread the handle into the ratchet assembly prior to use and ensure that the ratchet pawl is set so the clicking sound is heard when the ratchet assembly is turned counter clockwise.

- 6 Raise the threaded rod on the other reel stand until the spindle is level and the cable reel rotates freely. (See Figure 5F).


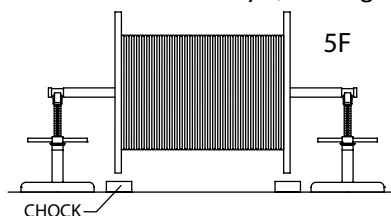


- 7 After dispensing cable, reverse the procedure above to lower the cable reel. Be sure to chock the cable reel as it is lowered to prevent movement.

MAINTENANCE

660/670

Prior to each use, apply a thin coat of a multi-purpose grease to the threaded shaft as well as between the handle nut and the top side of the support washer that the handle nut rests on.

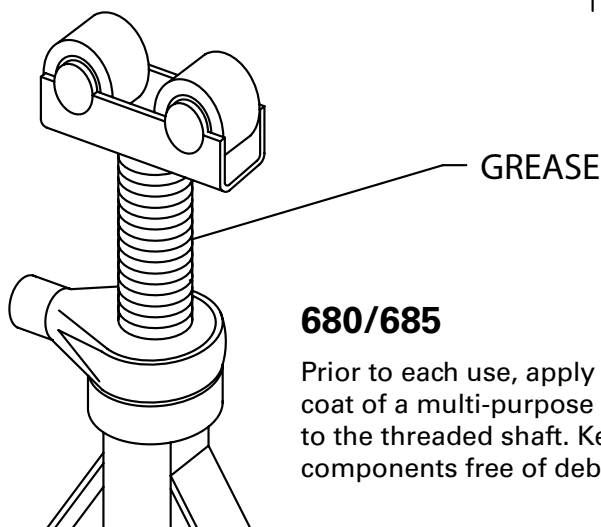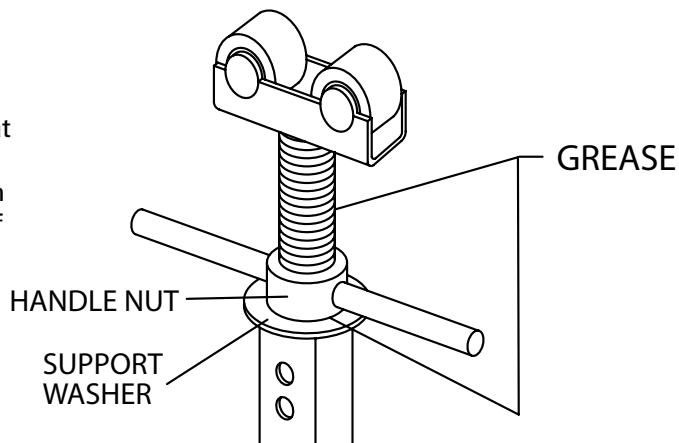


680/685

Prior to each use, apply a generous coat of a multi-purpose grease to the threaded shaft. Keep the components free of debris.

PARTS LIST – REEL STANDS

<u>PART #</u>	<u>QTY</u>	<u>DESCRIPTION</u>
680-10A	1	HANDLE WITH GRIP (680)
680-10E	1	PAWL (680)
680-10D	1	SPRING – RATCHET KNOB (680)
680-10B	1	KNOB – RATCHET (680)
680-10C	1	PIN – RATCHET (680)
660-7	1	STRANDED CABLE FOR 660 (12")
670-7	2	STRANDED CABLE FOR 670 (22")
670-6	1 (660), 2 (670)	FERRULE
670-6A	1 (660), 2 (670)	STOP
660-976	1 (660) 2 (670)	PIN – "L" SHAPE STOP

EXPLODED VIEW – MODEL #680 AND #685

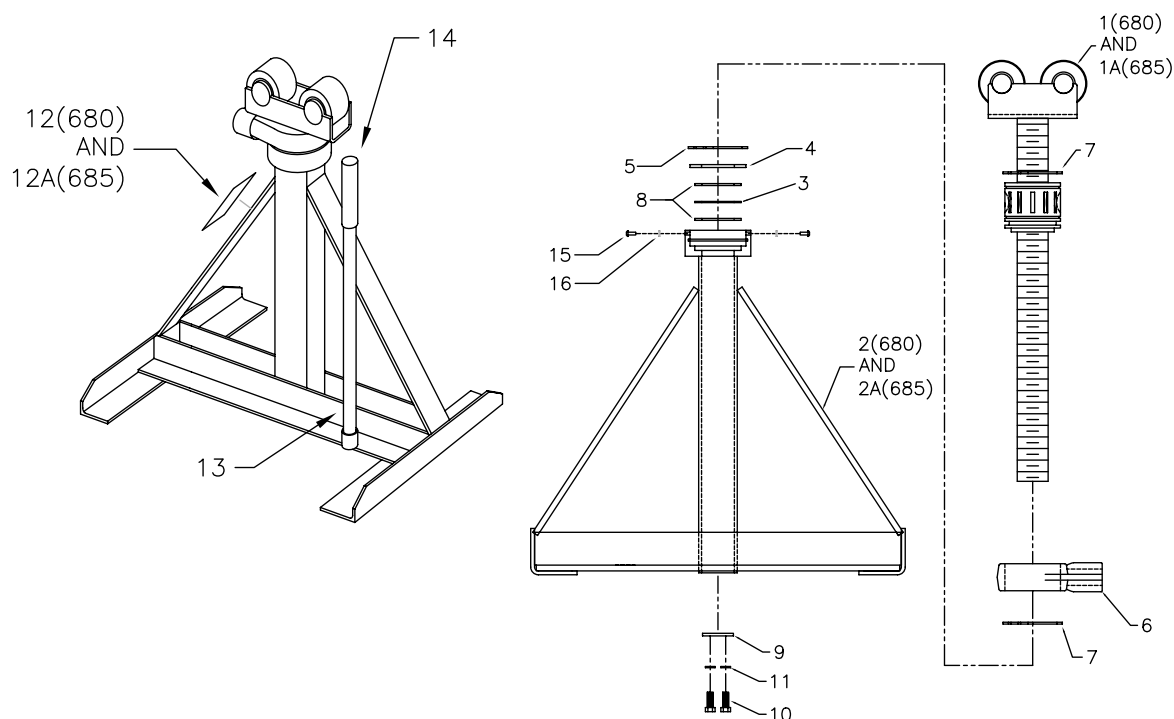

PARTS LIST – MODEL #680 AND #685

ITEM #	PART #	QTY	DESCRIPTION
1.....	680-978	1	HEAD WELDMENT – 680
1A.....	685-104	1	HEAD WELDMENT – 685
2.....	680-977	1	BASE WELDMENT – 680
2A.....	685-102	1	BASE WELDMENT – 685
3.....	680-3	1	THRUST BEARING
4.....	680-037	1	WASHER
5.....	680-7	1	RETAINING RING (RATCHET CUP BASE)
6.....	680-10	1	RATCHET HOUSING
7.....	680-6	1	RETAINING RING (INNER RATCHET)
8.....	680-5	1	THRUST WASHER
9.....	680-980	1	PLATE – STOP
10.....	524-11	2	SCREW – CAP, HEX HD 3/8-16 x 1"
11.....	452-27	2	WASHER – LOCK, 3/8
12.....	680-20	1	DECAL SET – 680
12A.....	685-DECAL	1	DECAL SET – 685
13.....	680-746	1	HANDLE
14.....	140-7	1	GRIP
15.....	685-001	2	SCREW – CAP, BUTTON HD #10 x 1/2" – (685 ONLY)
16.....	11-027	2	WASHER – LOCK, #10 – (685 ONLY)