
00520 Series Can-Link Connector
00522 Series Rope/Swivel Connector

The 00520 Connector is used to **connect two items** with lugs or wire loop fittings. A common use is to connect a **wire mesh grip to the pulling wire**. The connectors are manufactured from **high strength stainless steel** with hardened Clevis Pins. The two smaller sizes have **slotted Clevis Pins** while the larger ones have **hexagon Clevis Pins**.



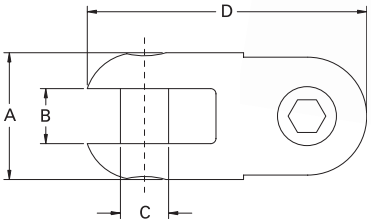

Catalog #	*Safe Working Load	A	B	C	D	Weight	UPC#
00520-010	2,500 lbs.	7/8”	3/8”	5/16”	2 1/8”	0.19 lb	811993023347
00520-020	5,000 lbs.	1 1/4”	17/32”	13/32”	2 7/8”	0.50 lb	811993023354
00520-027	9,000 lbs.	1 1/2”	19/32”	1/2”	3 3/8”	0.80 lb	811993023361
00520-035	15,000 lbs.	2”	25/32”	11/16”	4 9/16”	2lbs.	811993023378


Safety Factor of 3:1

The 00522 is used to **connect a swivel to pulling rope**. The entire product, including sheave, is manufactured from **stainless steel**.



Line Swivel Selection

Connector #	Use with these Line Swivels
00522-025	00505-020 00505-025 00505-027
00522-035	00505-030 00505-035

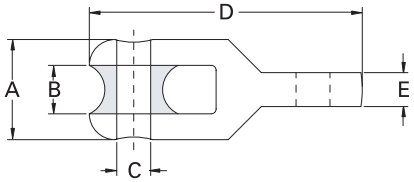

Catalog #	*Safe Working Load	Maximum Rope Diameter	A	B	C	D	E	Weight	UPC#
00522-025	7,000 lbs.	7/8”	2”	15/16”	11/16”	5 5/16”	1/2”	2.10 lbs.	811993023385
00522-035	15,000 lbs.	7/8”	2”	15/16”	11/16”	5 3/8”	21/32”	2.30 lbs.	811993023392
00522-040	30,000 lbs.	7/8”	2”	15/16”	11/16”	5 3/8”	21/32”	3.90 lbs.	811993026485

Safety Factor of 3:1