- **Only two shoes needed** to bend 1/2" to 2" Rigid, EMT and IMC conduit. Optional shoe group bends 1/2" to 2" 40 mil PVC coated Rigid conduit
- All major electrical components are **interchangeable** with **Model #77 Series Electric Bender**
- **Adjustable bend angle** limit switch for accurate repeat bends
- Proven electrical control system
- **Tilts** for horizontal bending in a tabletop position
- **Quick squeeze adjustment** for conduit support rollers
- Fork pockets for **easy lifting**
- **Lockable storage box** for accessories
- Flat free wheels
- **Made in the USA**





To bend 1/2" thru 2" EMT, IMC, Rigid, Rigid Aluminum and schedule 40 steel pipe. Can also bend 1/2" thru 2" 40 mil PVC coated Rigid conduit with optional shoe group.

UL LISTED
CONDUIT BENDER
91FF
c UL

MADE IN THE USA


Scan Here For Manual

Scan Here For Video

Catalog #	Description	Weight	UPC#
747	Omni Bender™	615 lbs.	811993025020


Bend Radius Chart

Size	EMT	IMC	Rigid	PVC
½"	4 5/16"	4 ¼"	4 ¼"	4 ¼"
¾"	5 ½"	5 7/16"	5 7/16"	5 7/16"
1"	7"	6 15/16"	6 15/16"	6 15/16"
1 ¼"	8 13/16"	8 ¾"	8 ¾"	8 ¾"
1 ½"	8 3/8"	8 ¼"	8 ¼"	8 ¼"
2"	9 ¼"	9"	9"	9"

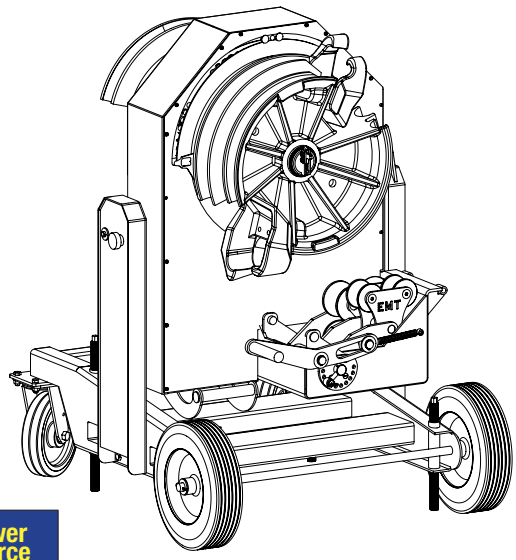

SPECIFICATIONS

Capacity	Dimensions	Weight	Power Source
½" to 2"Rigid conduit	Height: 45 1/4" Width: 32 1/2" Length: 44"	615 lbs. (with shoes)	120 vac; 20 amp GFCI protected receptacle required
½" to 2" EMT conduit			
½" to 2" IMC conduit			
½" to 2" Rigid aluminum conduit			
½" to 2" schedule 40 steel pipe			
½" to 2" 40 mil PVC coated Rigid conduit — with optional shoe group (shown below)			







700SP-7 40 Mil PVC Coated Rigid Shoe Group — UPC 811993025556

Item #	Catalog #	Description	Weight	UPC#
1	2-3200-7	PVC Coated Rigid 1/2" – 2" Shoe	47 lbs.	811993025983
2	2-4300-7	1/2" – 2" 40 Mil PVC Coated Rigid Roller Support	16 lbs.	811993025549
3	8-0501	Metal Storage Box 23" length × 17" height × 20" depth	36 lbs.	811993020438